


Non Contact Switch PCBA Model: M-A93 Series

Grommet

- Lower load current
- Lead free solder
- Auto output detection(3-Wire)
- Over current protection
- Over temperature protection

Auto Switch Internal Circuit

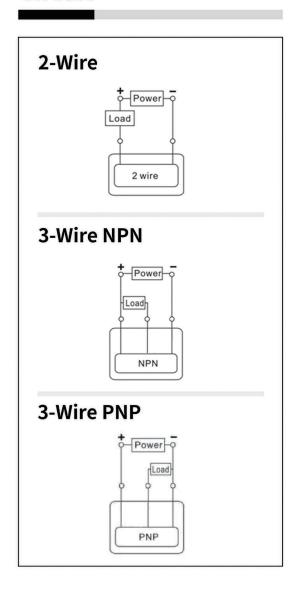


Auto Switch Specifications

PLC: Abbreviation of Programmable Logic Controller

| M-A93 (With indicator light , Without wire) | | |
|--|--------------------------|--------------------|
| Wiring type | 3-Wire | 2-Wire |
| Output type (Auto) | NPN,PNP | / |
| Applicable load | Relay , PLC , IC circuit | Relay , PLC |
| Load voltage | 4V ~ 30V | 4V~ 30V |
| Maximum load current | 200mA max | 100mA max |
| Internal voltage drop | 0.5V | 3V |
| Indicator light | Red LED | Red LED |
| Switch frequency | 1 KHz | 1 KHz |
| Leakage current | 10 uA | 10 uA |
| Over current protect | Yes | Yes |
| Over temperture protect | Yes | Yes |
| Operation temperture | -10°C~70°C | -10℃~70℃ |
| Other protection | Reverse Protection | Reverse Protection |

Dimensions

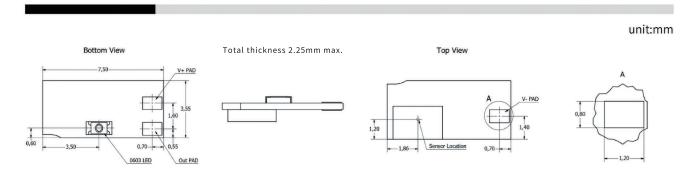

Warning **A**

- 1. Be sure to connect the load before power is applied.
- 2. Confirm proper insulation of wiring.
- 3. Do not wire with power lines or high voltage lines.
- 4. Do not allow short circuiting of loads.
- 5. Avoid incorrect wiring as

2-Wire: If connections are reversed on a 2-wire type switch, the switch will not be damaged if protected by a protection circuit, but the switch will always stay in an ON state. However, it is still necessary to avoid reversed connections, since the switch could be damaged by a load short circuit in this condition.

3-Wire: If connections are reversed (power supply line (+) and power supply line (–) on a 3-wire type switch, the switch will be protected by a protection circuit. However, if the power supply line (+) is connected to the blue (black) wire and the power supply line (–) is connected to the black (white) wire, the switch will be damaged.

6. Do not use a load that generates surge voltage.